

# TQMa8Xx

Arm® Family



## HIGHLIGHTS


- ▶ Graphic with 3D GPU Support
- ▶ DSP for audio processing
- ▶ High-speed communication via 2x Gbit Ethernet, 1x PCIe and 1x USB 3.0
- ▶ Low power consumption (typ. 4 W)
- ▶ Integrated 1x Cortex® M4 CPU (Real Time/Security)
- ▶ 3x CAN FD
- ▶ Integrated security functions

**Embedded Cortex®-A35 module based on i.MX8X with high computing power combined with high-speed interfaces.**

## TECHNICAL SPECIFICATION

<b>CPU</b>	Cortex®-A35 Technology i.MX8X Dual Plus i.MX8X Quad Plus	<b>Memory</b>	DDR3L-SDRAM: Up to 2 GB with ECC protection Quad SPI NOR: Up to 256 MB Up to 64 GB eMMC Flash EEPROM: 0/64-kbit
<b>Interfaces</b>	Up to 2x Ethernet 10/100/1000 Mbit Up to 1x USB 3.0 OTG interface Up to 2x USB 2.0 OTG interface Up to 4x UART Up to 3x CAN FD	<b>Other</b>	Real Time Clock (RTC) Secure Element SE050 (optional) Temperature sensor CPU JTAG interface
<b>Periphery interfaces</b>	1x SDIO/MMC 1x PCIe Up to 8x I <sup>2</sup> C Up to 4x SPI Up to 2 Q-SPI Up to 2x SPDIF Up to 4x ESAI Up to 32 GPIO	<b>Power supply</b>	3.3 V
<b>Graphic</b>	Dual LVDS Interface / 2xMIPI DSI 1x MIPI CSI	<b>Ambient conditions</b>	Standard temperature range: -25°C...+85°C Extended temperature range: -40°C...+85°C
		<b>Dimensions</b>	55 mm x 44 mm
		<b>Plug-in system</b>	Board-to-board plug-in system 280 pins
		<b>Operating systems</b>	Linux, PikeOS, QNX
		<b>Operating systems on request</b>	Android

## BLOCK DIAGRAM TQMa8XX

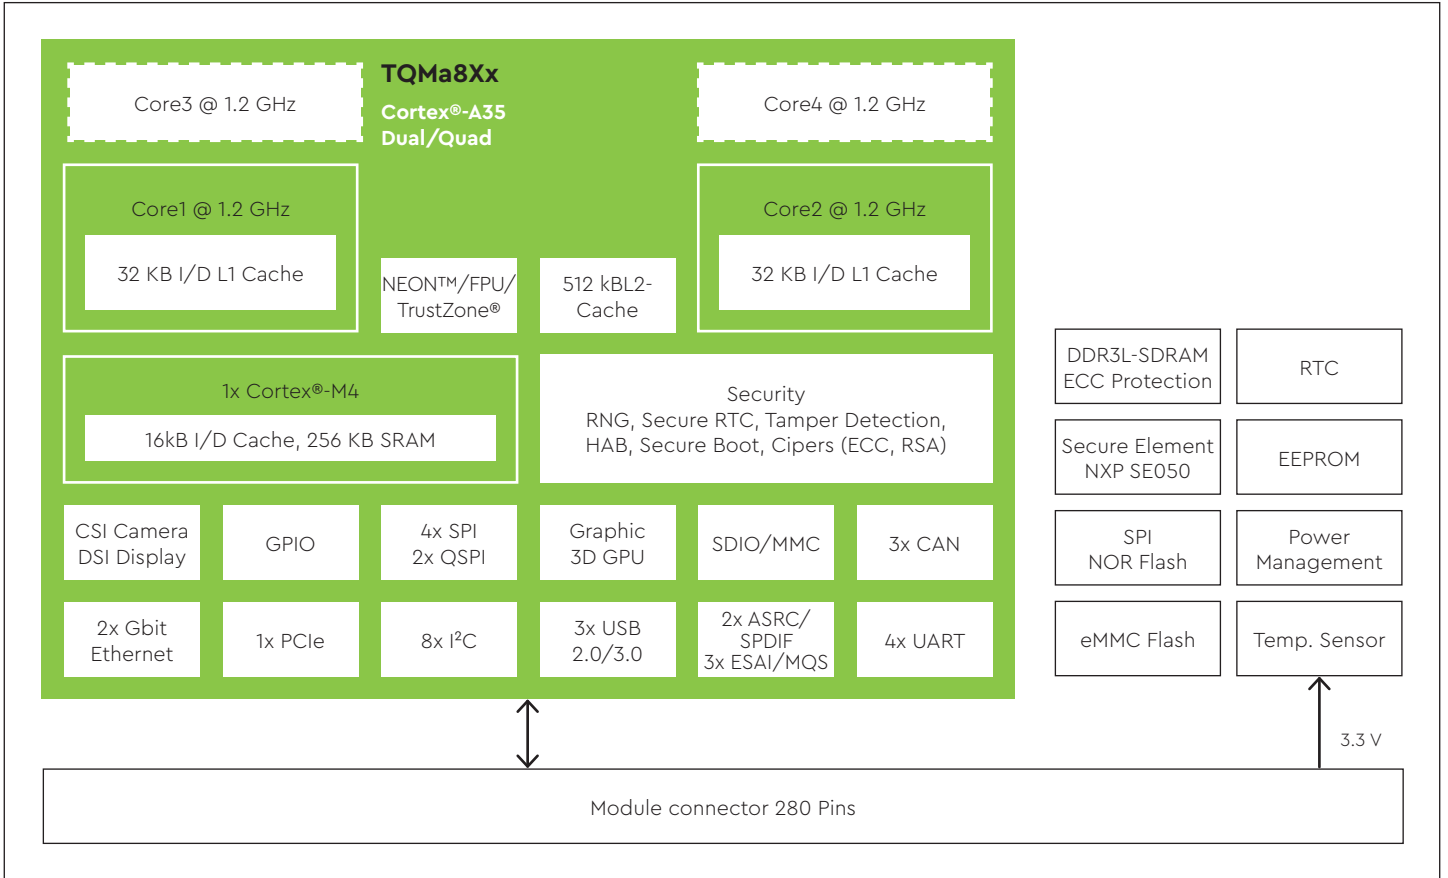

## ORDERING INFORMATION

<b>TQMa8XDP-AA</b>	i.MX8X Dual Plus/typ 1.0 GHz/max 1.2 GHz, 8 GB eMMC Flash, 1 GB DDR3L w ECC, 64 kB EEPROM, RTC, -25°C...+85°
<b>TQMa8XQP-AA</b>	i.MX8X Quad Plus/typ 1.0 GHz/max 1.2 GHz, 8 GB eMMC Flash, 1 GB DDR3L w ECC, 64 kB EEPROM, RTC, -25°C...+85°
<b>TQMa8XQP-AB</b>	i.MX8X Quad Plus/typ 1.0 GHz/max 1.2 GHz, 8 GB eMMC Flash, 64 MB SPI NOR Flash, 1 GB DDR3L w ECC, 64 kB EEPROM, RTC, -40°C...+85°C

Other configurations on request

<b>STKa8Xx-AA</b>	STKa8Xx (Eval Kit) with TQMa8Xx-AA, i.MX8X/typ 1.0 GHz/max 1.2 GHz, 1 GB DDR3L w ECC, 8 GB eMMC Flash, 64 kB EEPROM, 1x RS232, 2x CAN FD separated, 1x USB 3.0 OTG, 4x USB 2.0 HOST, 2x ETH 10/100/1000, 1x HDMI/DP, 2x LVDS/DSI, 1x PCIe, RTC, Temperature sensor, Reset-Button, SD interface, Power Supply, 4 GB SD card, Cables
-------------------	--

**Starterkit STK8Xx set** The core of the STKa8Xx set is the TQMa8Xx module with a i.MX8X Cortex®-A35 CPU. The components contained in the starter kit constitute a modular system enabling you to develop your own product ideas. Development of graphic interfaces can be started immediately using a TQ display kit which is adjusted for a starter kit. To develop your own hardware you can use the certified and qualified circuit components of the starter kit in your own designs.

**TQ-Systems GmbH**  
 Mühlstraße 2 | Gut Delling | 82229 Seefeld | Germany  
 Tel.: +49 8153 9308-0 | info@tq-group.com | tq-group.com

[tq-embedded.com](http://tq-embedded.com)